


8 Span FAIR's Order Form



Due to manufacturing tolerances we do not recommend that more than 3 FAIRs are fitted in a continuous run across the roof width.

Filler Blocks are 50mm wide as standard. Top and bottom filler blocks are required as they act as closures for the sheet, if these do not fall in line with your purlin centres please select a form with more spans. Wider filler blocks are available at an extra cost.

Accord Steel Cladding Ltd
 Unit 33 Dawley Trading Estate
 off Stallings Lane
 Kingswinford
 DY6 7AP
 Tel: 01384 273811
 Fax: 01384 277399
 sales@steelroofsheets.co.uk
 www.steelroofsheets.co.uk

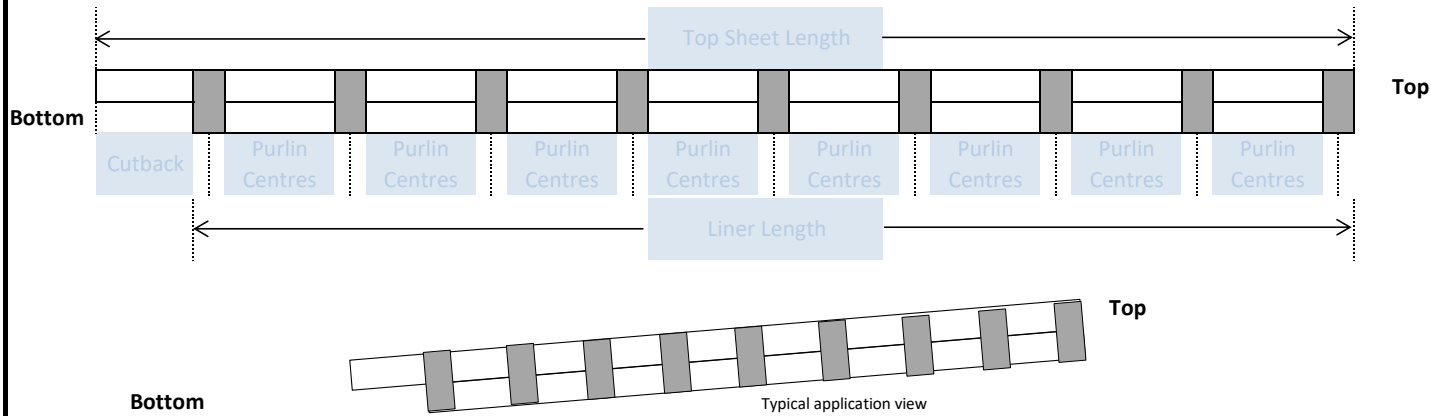

Top

Bottom

Typical application view

Composite System:	
Core Thickness:	
Quantity Left To Right: (as viewed from Bottom)	
Quantity Right To Left: (as viewed from Bottom)	

Customer Name:	
Order Number:	
Special Instructions/Notes:	
Number of Pages:	OF

Please mark 'X' in the box for required top sheet weight

Top Sheet Weight	
2.4 kg/m ² (Standard):	<input type="checkbox"/>
3.0 kg/m ² :	<input type="checkbox"/>
3.6 kg/m ² :	<input type="checkbox"/>
4.5kg/m ² :	<input type="checkbox"/>

Please mark 'X' in the box for required U-Value

U-Value	
Double Skin - 3.0W/m ² K:	<input type="checkbox"/>
Not part L Compliant	
Triple Skin - 1.9 W/m ² K (Standard):	<input type="checkbox"/>
1.3W/m ² K:	<input type="checkbox"/>
1.0W/m ² K:	<input type="checkbox"/>
0.9W/m ² K:	<input type="checkbox"/>
OTHER:	<input type="checkbox"/>
Please specify U-Value	

*For information relating to non-fragility & rooflight U-values please refer to Technical Data sheets which are available from our website: www.steelroofsheets.co.uk or from our sales team.
 Please note that all FAIRs to suit composite panels are fitted with metal underlap strips as standard.

Please complete all sections in blue.

For alternative spans please download the relevant pages from our website www.steelroofsheets.co.uk or contact our sales team.